
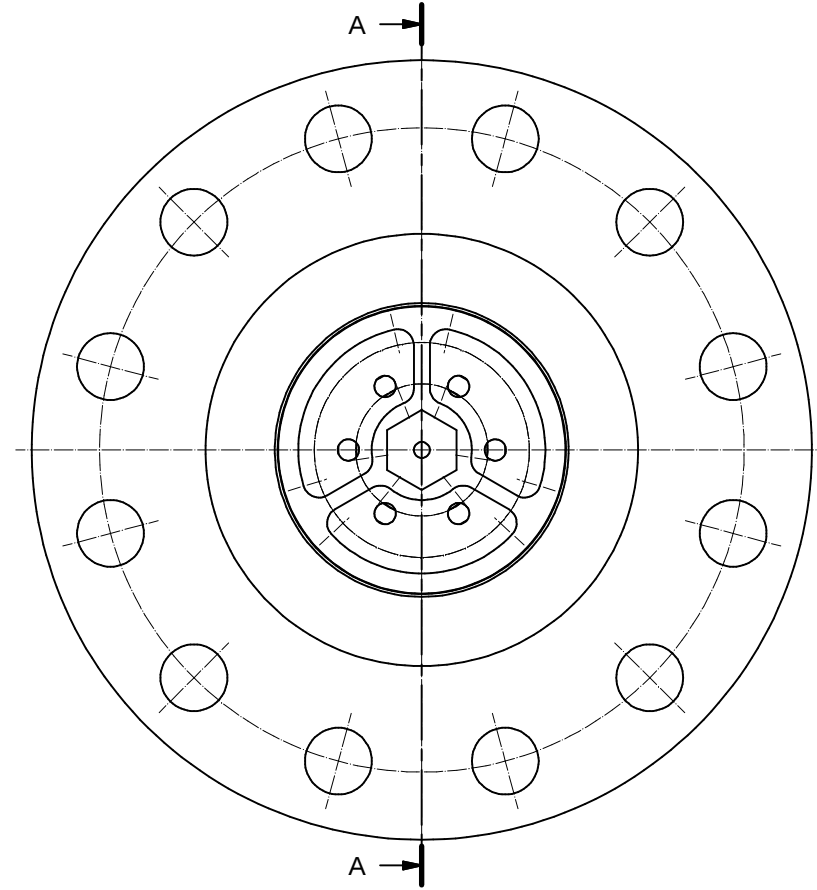


A-A (1:4)

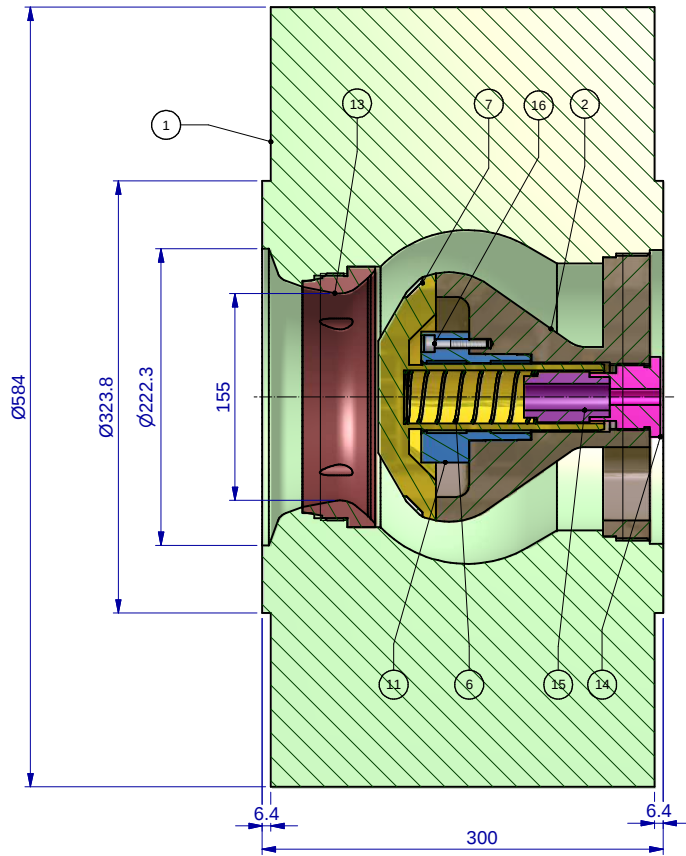

DESIGN acc.to API 594		
PRESS. 255Bar	TEMP. 0 TO 350 °C	
PRESSURE TEST acc.to API 6D		
BODY hydr.	SEAT hydr.	SEAT air
384 Bar	282 Bar	6 Bar
SIZE	Body	
RATING	☒	☐
MATERIAL	☒	☐
CHARGE NUMBER	☒	☐
ARROW FLOW DIRECTION	☒	☐
MANUFACTURERS SYMBOL	☒	☐
"CE" SYMBOL	☒	☐
NOTIFIED BODY ID.	☒	☐
N.D.T. SYMBOL	☒	☐
MANUF. INSP. STAMP	☒	☐
INSPECTION AUTH. STAMP	☒	☐
CLIENT'S ID. NUMBER	☐	☐
CLIENT'S ID. STAMP	☐	☐
VALVE NUMBER	☒	☐
YEAR OF MANUFACTURE	☒	☐

Weight : 494 kg
(1090 lbs)

Parts List			
ITEM	QTY	DESCRIPTION	MATERIAL
1	1	Body nonslam check 10"-1500lbs	A350-LF2
2	1	Disc support	A182-F316
6	1	Spring	SS 316
7	1	Disc	13% Chrome / stellited
11	1	Bearing bush High T	A182-F316
13	1	Seat nonslam check DN250	13% Chrome
14	1	PLUG	A182-F316
15	1	SPRING GUIDE	A182-F316
16	3	Hex Head Cap Screw	SS

Size/Description/Rating/Ends:			Drawing No:	
Nonslam Check 10"-1500 lbs BW			NS0250M1003	
 HARDINXVELD - GIESSENDAM THE NETHERLANDS		Design:	jhvanvliet	9-2-2010
		Checked:		
This document remains the property of Merwede Valves BV. All rights reserved. This document or any part thereof may not be made public or disclosed, copied or otherwise reproduced or used in any form or by any means, including but not limited to the use herof for the design and manufacturing of identical or similar parts or products, without prior permission in writing from Merwede Valves BV.			Scale: 1:4	Revision: 0
			A3	