
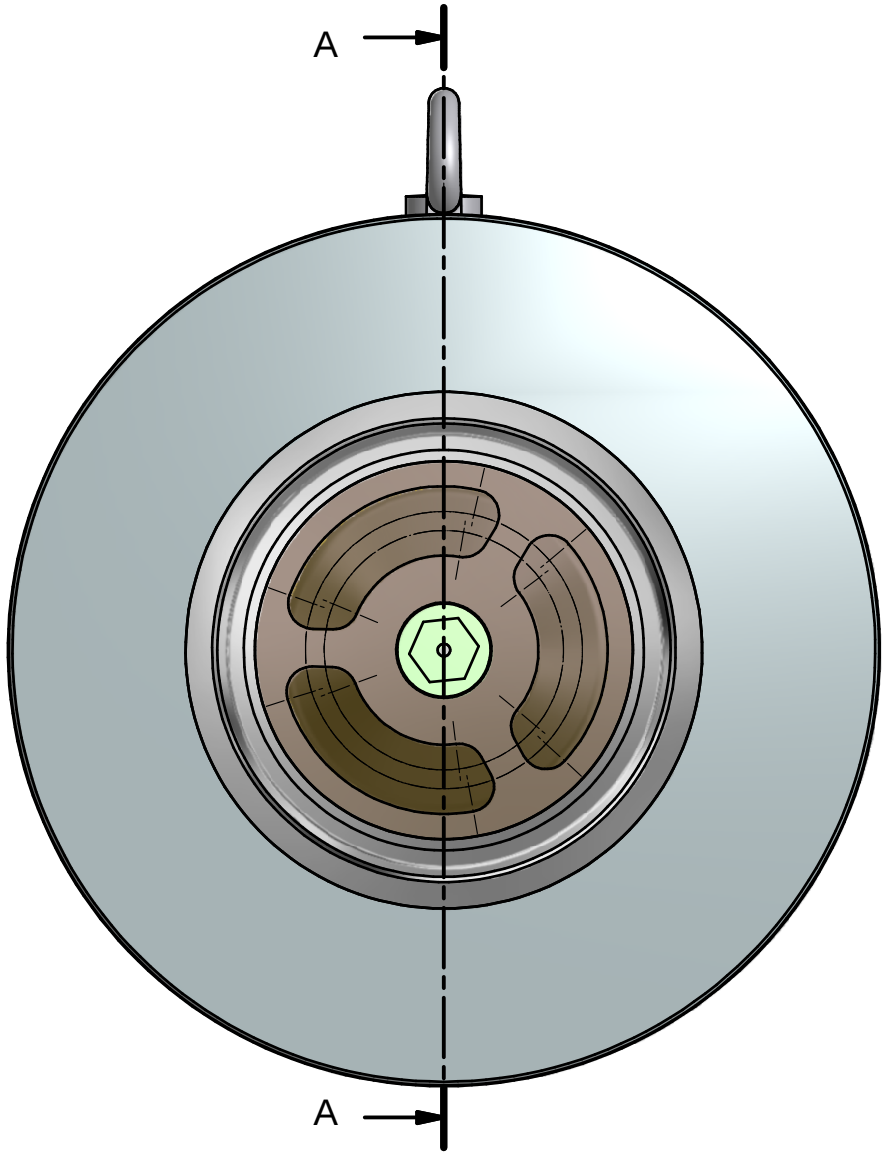


A-A (1:3)

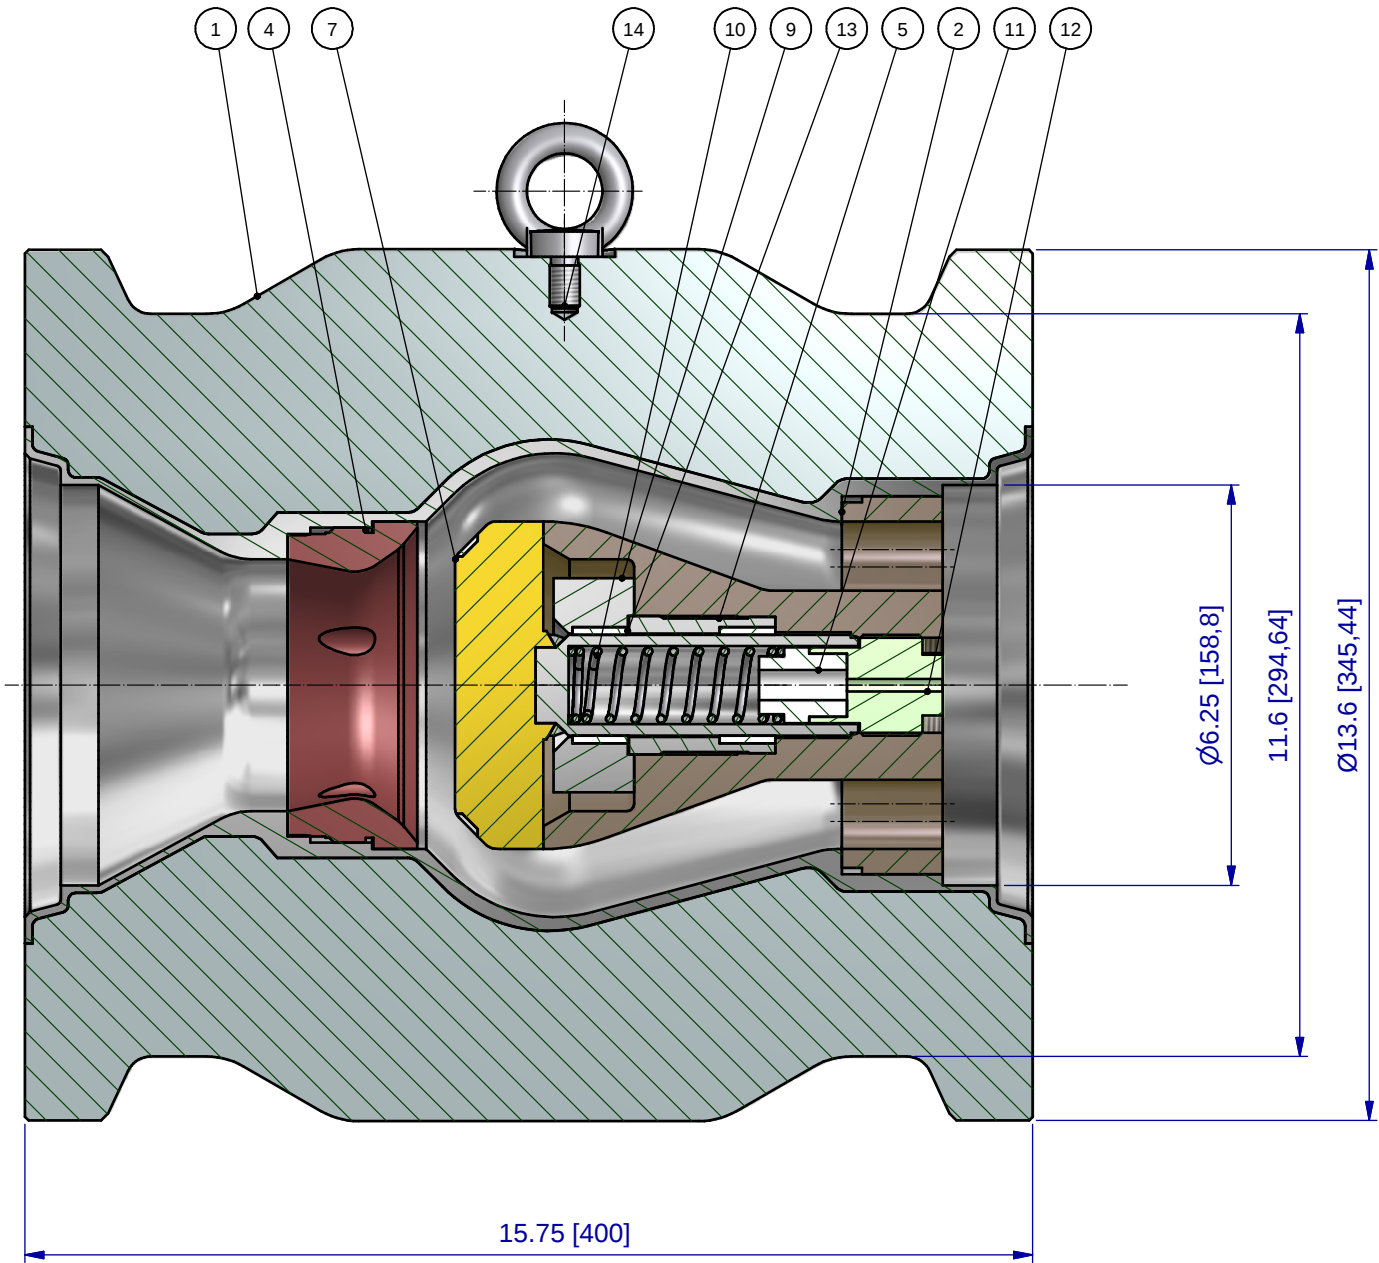

DESIGN acc.to API 6A		
PRESS. 20000 psi	TEMP.-40 to 392°F	
PRESSURE TEST acc.to API 6A		
BODY hydr.	SEAT hydr.	SEAT air
30000 psi	22000 psi	86 psi

Parts List			
ITE	QTY	DESCRIPTION	MATERIAL
1	1	Body	F22/ALLOY625
2	1	Disc Support	Alloy 625
4	1	Seat stellited	Alloy 625
5	1	Bearing	PEEK
7	1	Disc stellited	Alloy 625
8	3	Cylinder Head Cap Screw	SS 316
9	1	Bearing bush	A182-F316
10	1	Spring	Alloy X750
11	1	Spring guide	A182-F316
12	1	PLUG	A182-F316
13	2	Bearing	PEEK
14	1	Lifting Eyebolt	Stainless

Weight : 498 lbmass
Dimensions in Inch (mm in brackets)
10IN64 hubend is for reference only!
(can accommodate 10,75" pipe)

Size/Description/Rating/Ends: Nonslam Check 10"- 20K Hub 10IN64				Drawing No: NSCK150XHH	
 HARDINXVELD - GIESSENDAM THE NETHERLANDS	Design:	jhv	27-3-2015	Scale: 1:3	
	Approved:			Revision: 0	
	This document remains the property of Merwede Valves BV. All rights reserved. This document or any part thereof may not be made public or disclosed, copied or otherwise reproduced or used in any form or by any means, including but not limited to the use herof for the design and manufacturing of identical or similar parts or products, without prior permission in writing from Merwede Valves BV.			A3	