


DESIGN according: BS 1873				
PRESS.: 414 Bar TEMP: -200 to 425 °C				
PRESSURE TEST acc. BS 6755 Pt.1				
BODY	hydr.	SEAT	hydr.	SEAT air
621	Bar	456	Bar	6-7 Bar
MARKING:				
SIZE				☒ BODY
RATING				☒ BONNET
MATERIAL				☒
CHARGE NUMBER				☒
ARROW FLOW DIRECTION				☒
MANUFACTURERS SYMBOL				☒
"CE" SYMBOL				☒
NOTIFIED BODY IDENTIFICATION				☒
N.D.T. SYMBOL				☒
MANUFACTURERS INSP. STAMP				☒
INSPECTION AUTHORITY STAMP				☒
CLIENT'S IDENTIFICATION NUMBER				☒
CLIENT'S IDENTIFICATION STAMP				☒
VALVE NUMBER				☒
YEAR OF MANUFACTURE				☒
RING NR. R16				☒

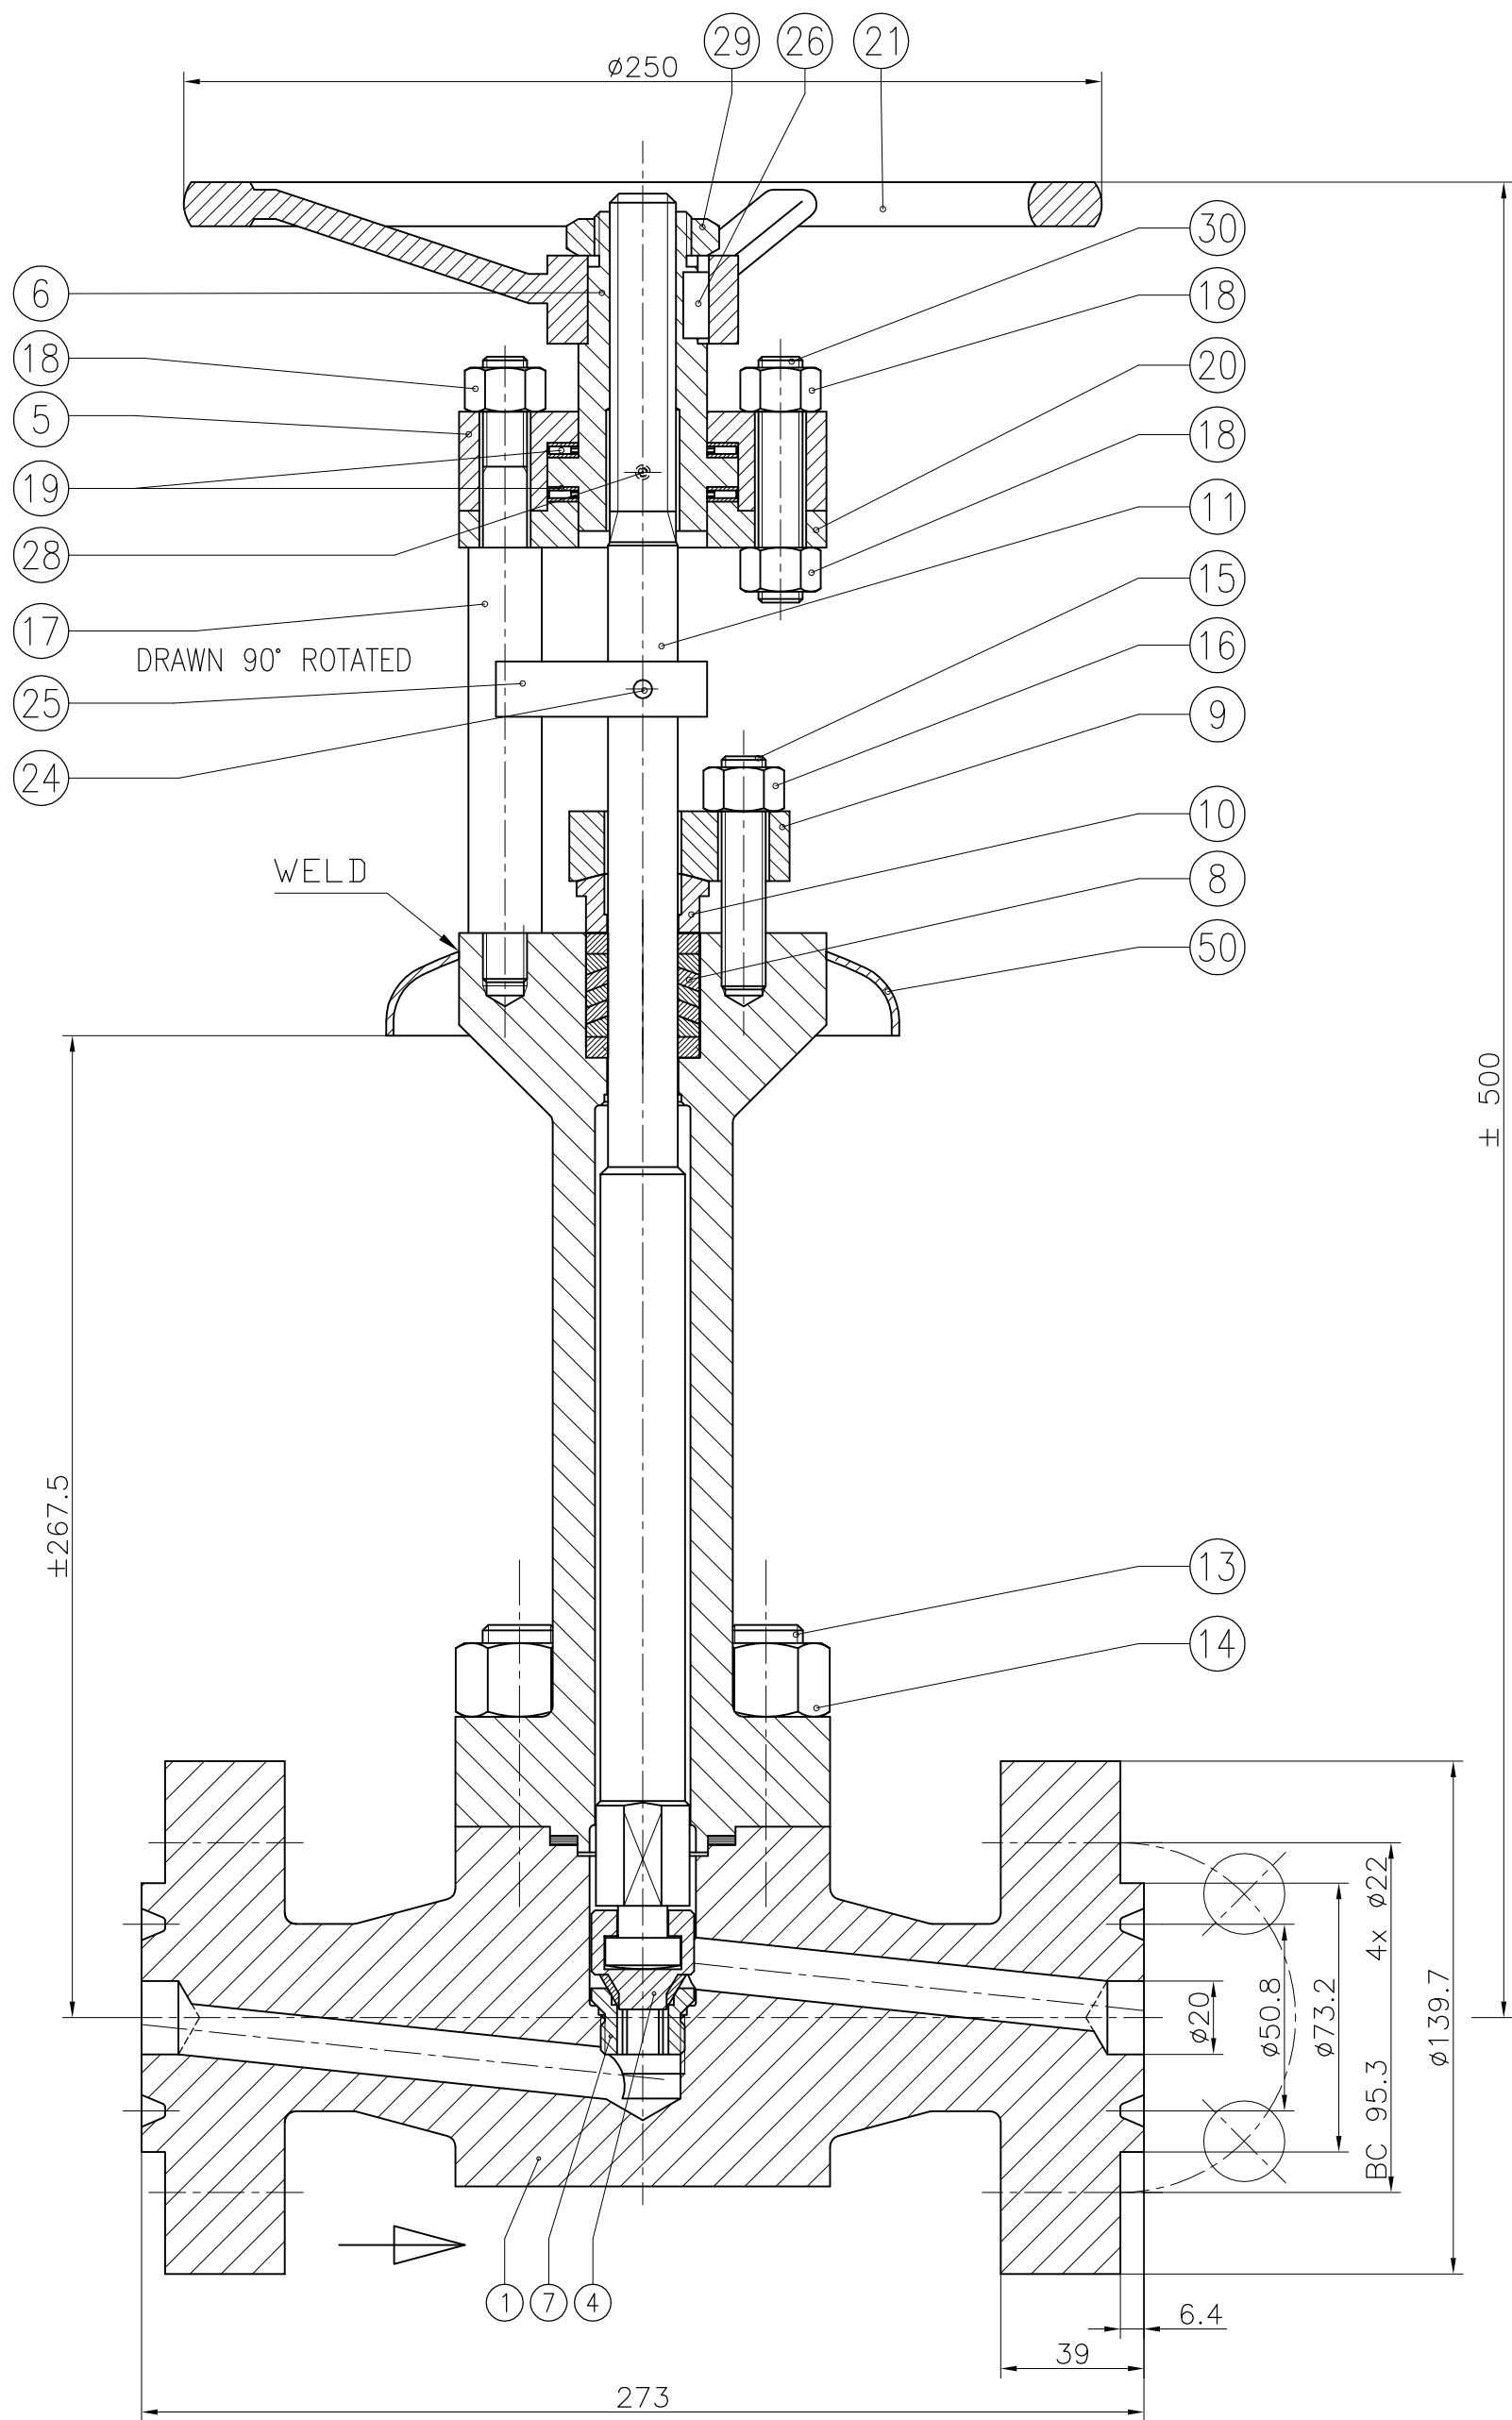

BONNET EXTENDED 200 mm

Size/Description/Rating/Ends				Drawing nr.	
DN20 GLOBE VALVE 2500 LBS RTJ				5-6673	
Extended bonnet L=200				Sheet 1	
 HARDINXVELD - GIESSENDAM THE NETHERLANDS		Name	Date	Scale 1:2	
		Design	ÖÇ	09-02-2012	Revision: 0
		Checked		A3	
		Approved	J. van Vliet		